CCS Technical Documentation
RH-3 Series Transceivers

Disassembly

©Nokia Corporation

©Nokia Corporation Confidential

ESD Protection

Step-by-Step Disassembly Instructions

Remove the battery cover (B-cover)

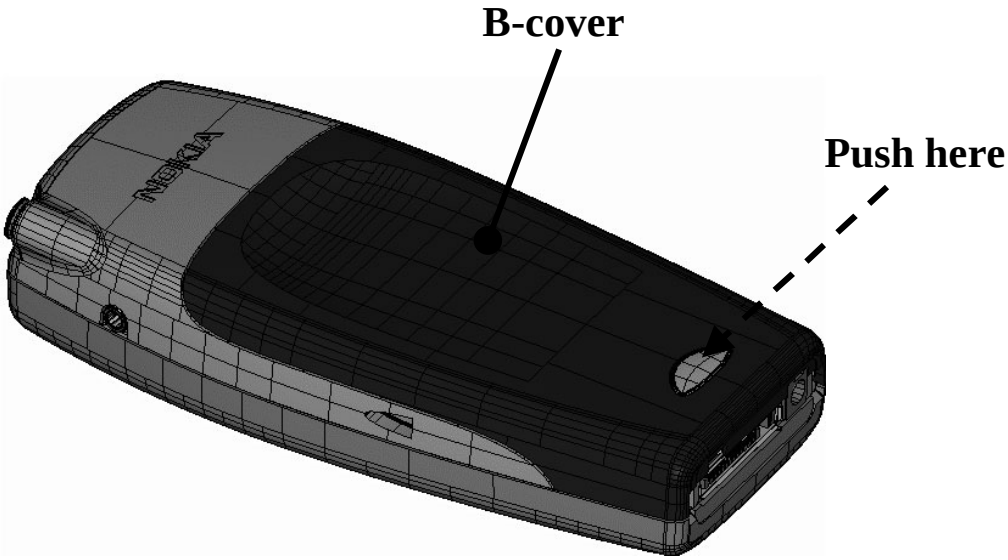

1 Turn the phone off.

2 Remove the battery cover (B-cover) by pushing down on the release button.

3 Remove battery.

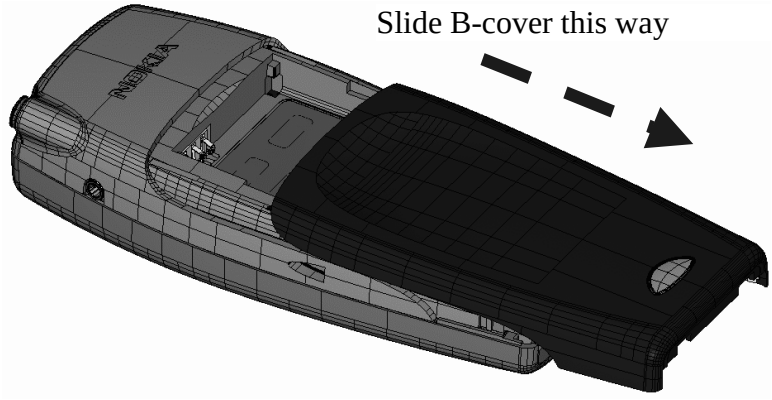

Remove A-cover

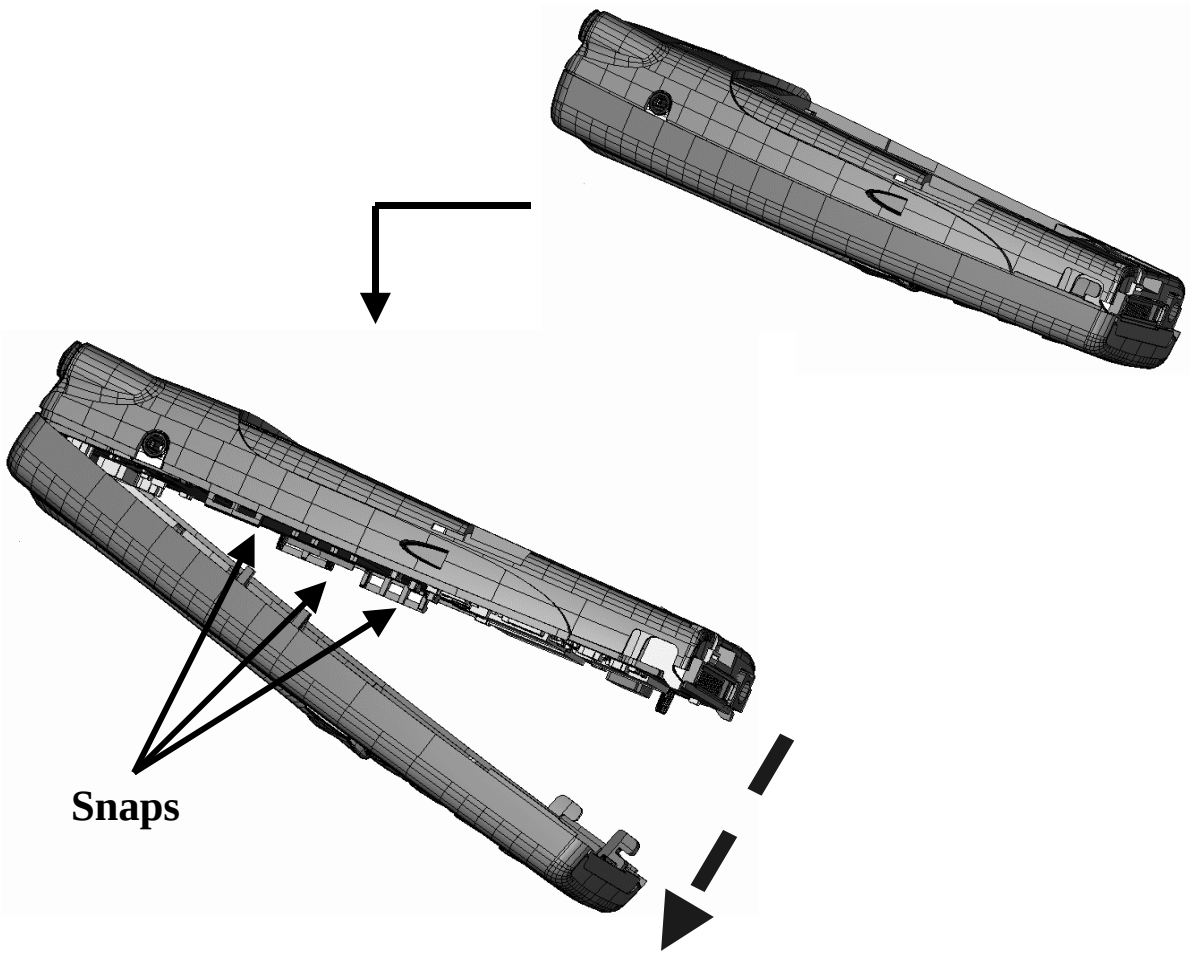

Remove screws using a nonconductive screwdriver

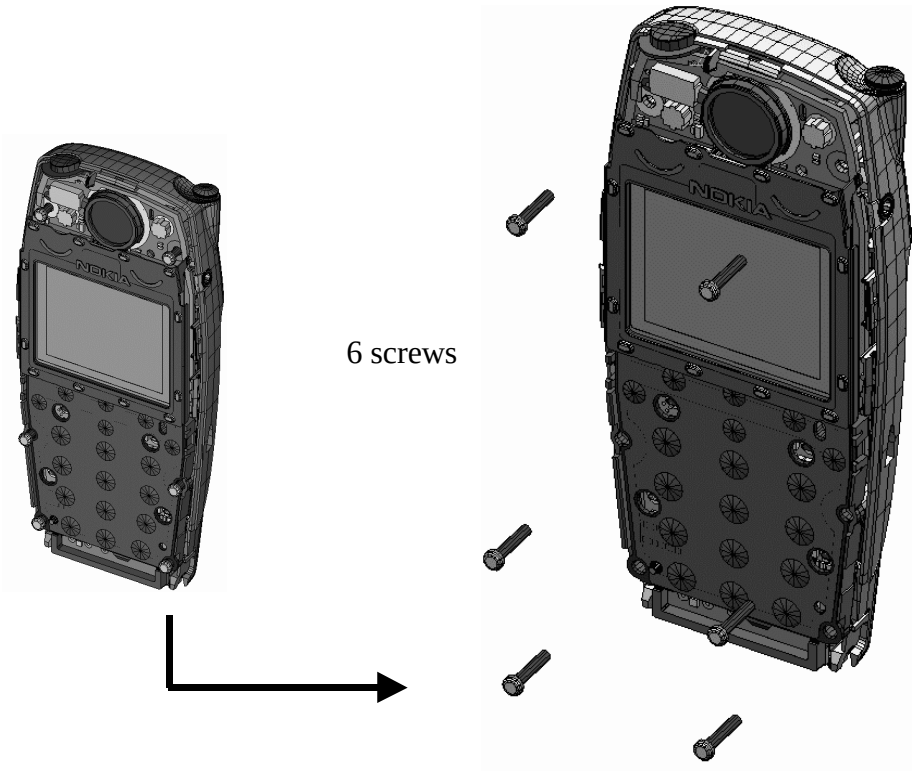

Remove LCD Assembly

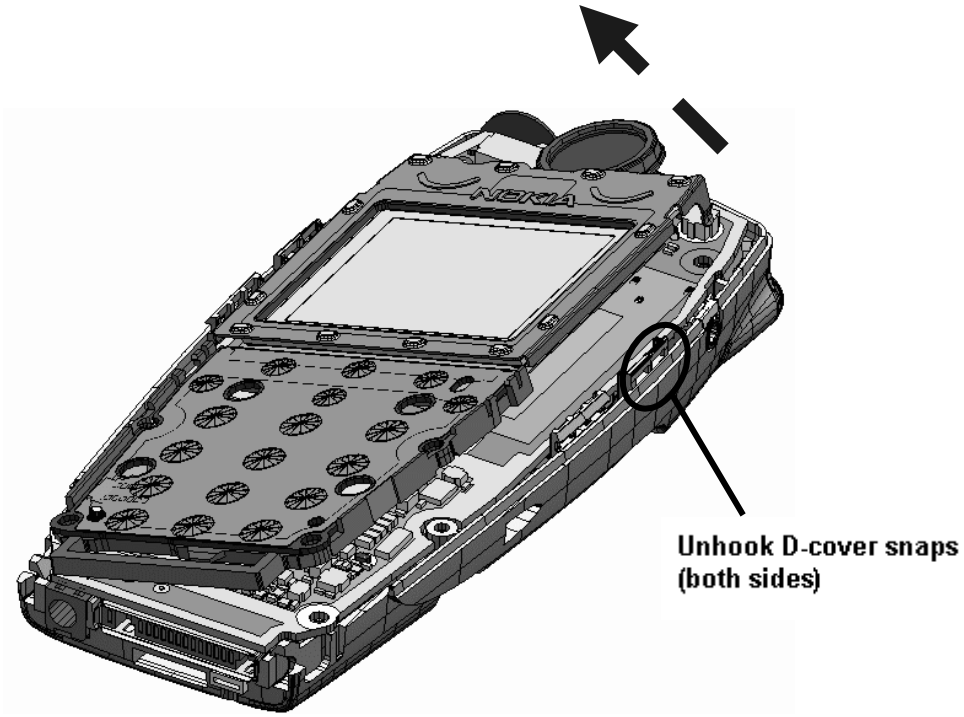

Separate PWB from D-cover Assembly

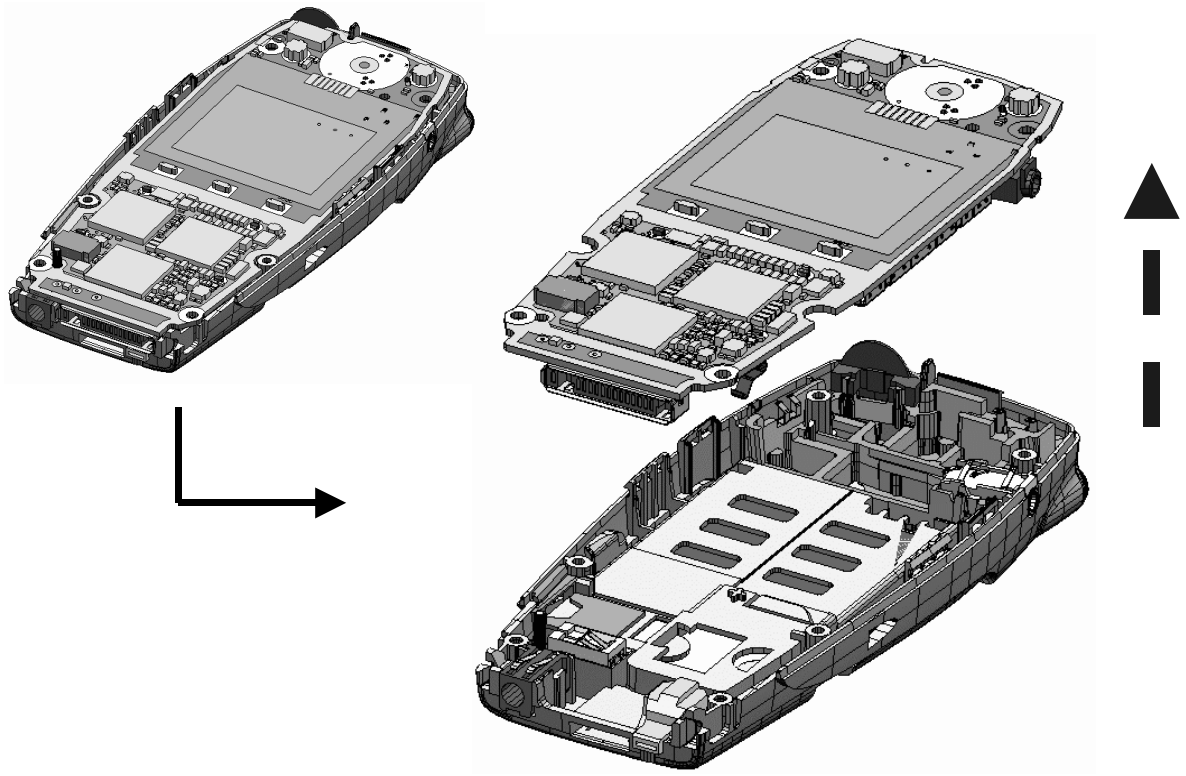

Power Key Removal

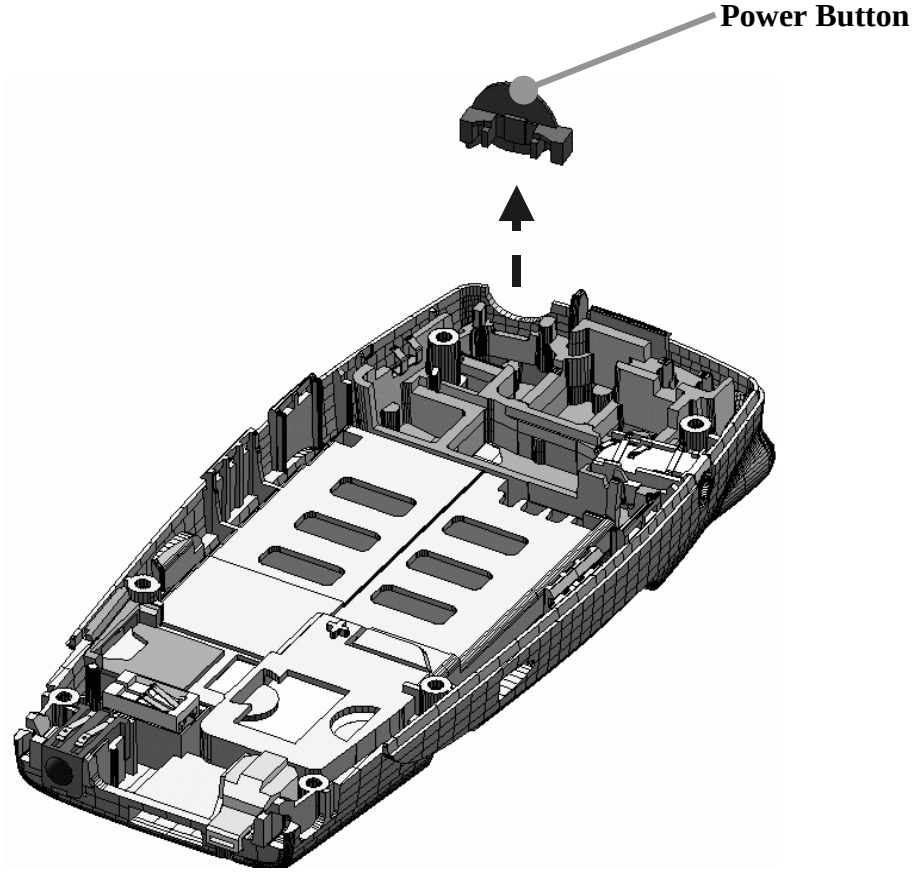

PIFA Antenna Removal

PIFA antenna

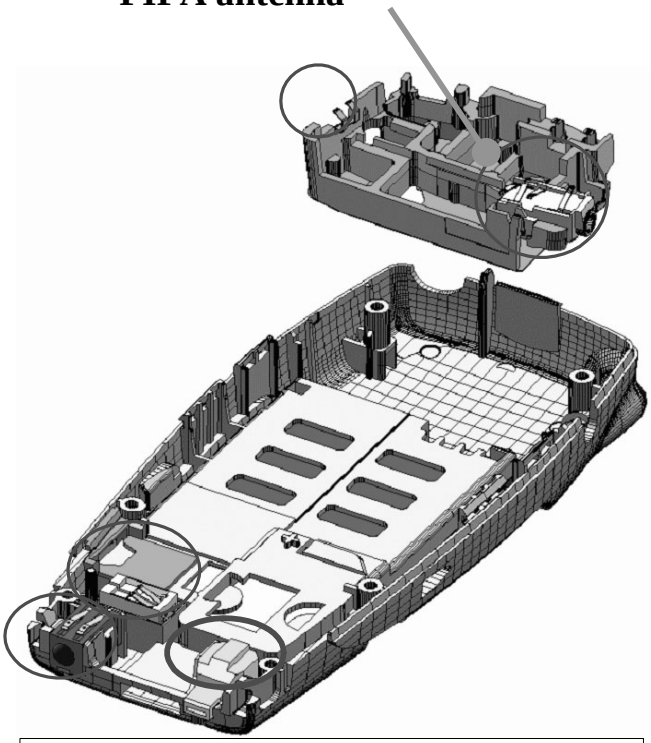

DO NOT TOUCH gold contacts with bare fingers!

Other Item Removal

- Headset jack (in PIFA antenna)
- Whip assembly
- DC jack
- Microphone
- Buzzer gasket
- Vibra motor

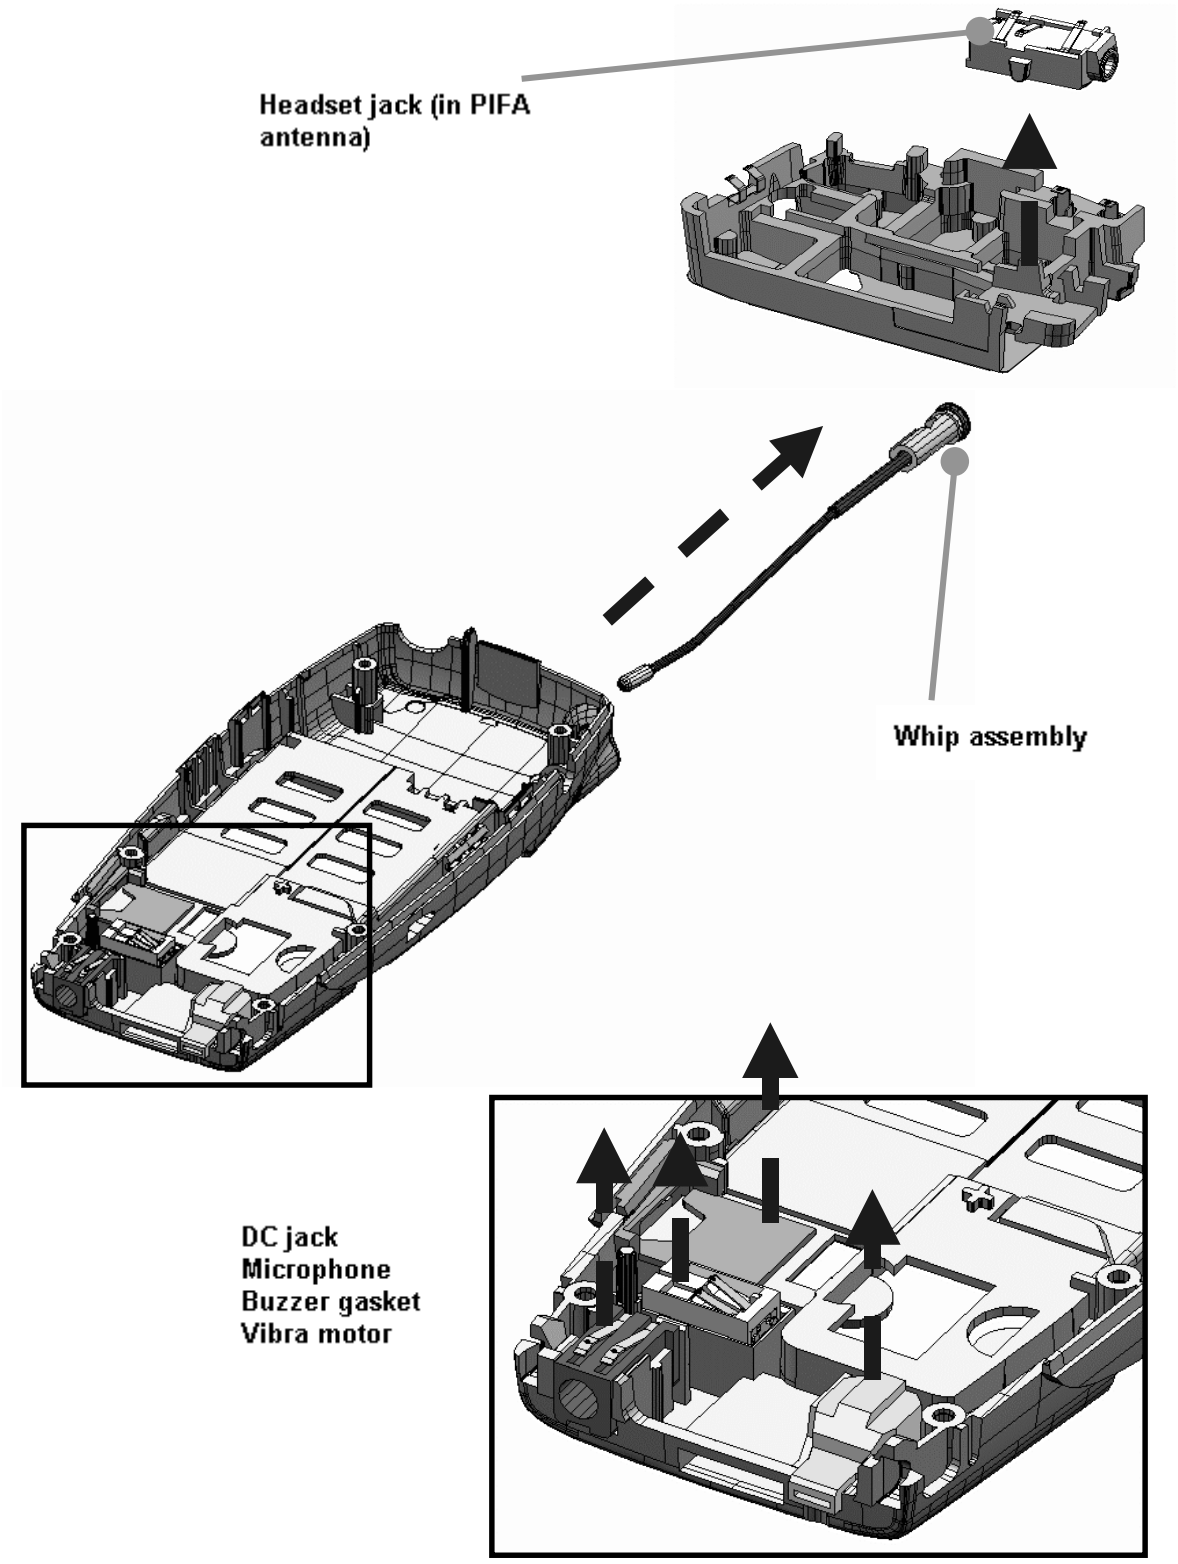
Headset jack (in PIFA antenna)
Whip assembly
DC jack
Microphone
Buzzer gasket
Vibra motor